





2024 DIRTcar Late Model Body Diagrams



- | | |
|---|--|
| 1.2c Stock nosepiece can extend a maximum of fifty-three inches (53") from center of front hub to farthest point extending forward | 1.7a Fifty-four inches (54") MAXIMUM center of rear hub to top corner of quarter panel |
| 1.3d Minimum thirty eight inches (38") from bottom of roll cage to top of the floor pan | 1.7f Forty-nine inches (49") MAXIMUM length from center of rear hub to end of quarter panel |
| 1.5d Front fenders cannot exceed thirty-seven inches (37") in height measured from the ground | 1.7g Thirty-nine inches (39") MAXIMUM height from top of deck to ground |
| 1.5g The front fender flares may not be higher than fenders by more than four inches (4") | 1.7h MINIMUM of two inches (2") tire clearance from body |
| 1.6c Doors cannot exceed thirty-seven inches (37") in height measured from the ground | 1.7i Skirting cannot extend beyond the quarter panel |

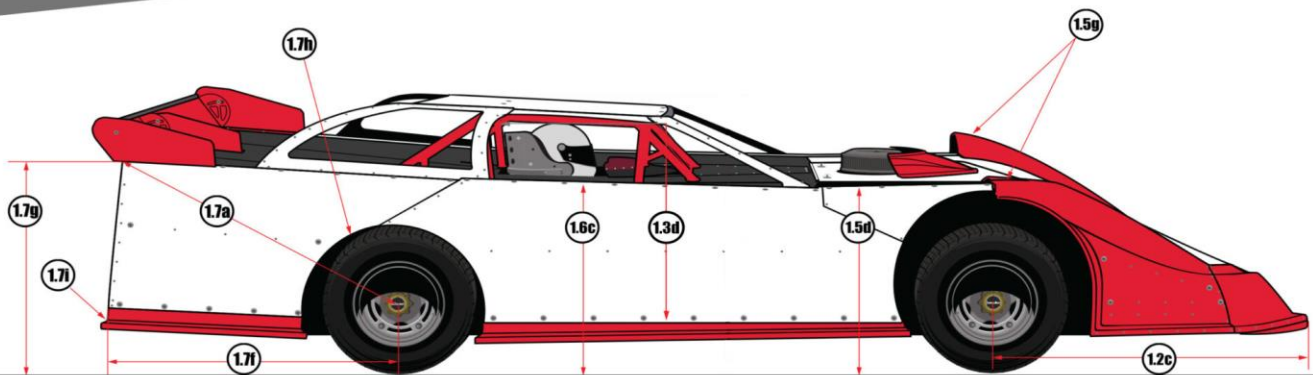


2024 LATE MODEL BODY DIMENSIONS QUARTER PANEL OPTIONS

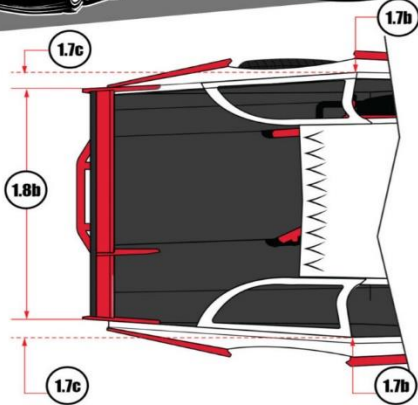

OPTION 1

Rear decks must taper from seventy-six inches (76"), as measured at the top over the rear hubs, uniformly back to seventy-two inches (72") at the spoiler, equally on both sides.

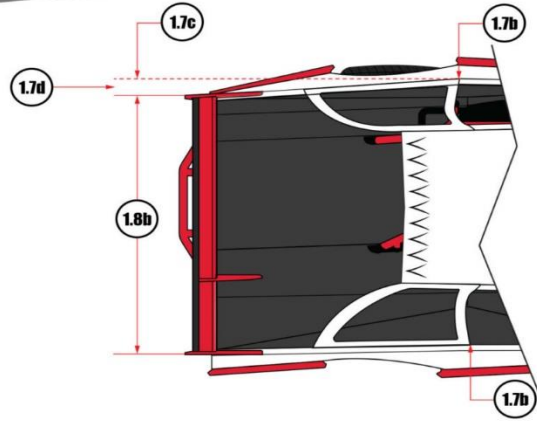


OPTION 2


Rear decks must taper from seventy-six inches (76"), as measured at the top over the rear hubs, uniformly back to seventy-two inches (72") at the spoiler, equally on both sides.




2024 LATE MODEL BODY DIMENSIONS SIDE VIEW SPECIFICATIONS

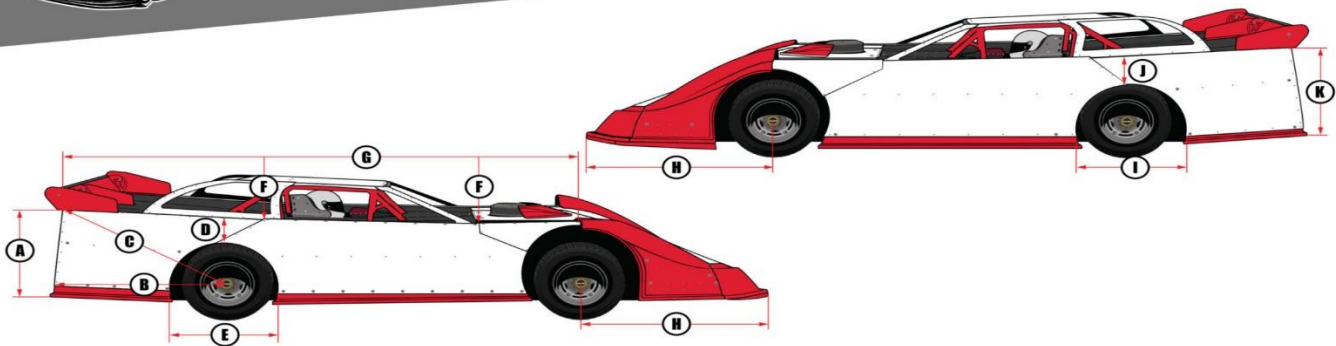

- A** Twenty-Seven inches (27") MINIMUM, Thirty-One inches (31") MAXIMUM INCLUDING Plastic
- B** Forty-Nine inches (49")
- C** Fifty-Four inches (54")
- D** Eight inches (8") MINIMUM
- E** Twenty-Nine inches (29") MINIMUM, Thirty-Two inches (32") MAXIMUM
- F** One Inch (1") Drop
- G** Two inches (2") Drop at from rear of car to top of fender
- H** Fifty-Three inches (53")
- I** Twenty-Eight inches (28") MINIMUM, Thirty-Three inches (33") MAXIMUM. Opening at sheet metal MUST be a symmetrical circle
- J** Ten inches (10") MINIMUM
- K** Thirty-Three inches (33") MINIMUM, Thirty-Six inches (36") MAXIMUM INCLUDING Plastic




2024 LATE MODEL BODY DIMENSIONS SPOILER SUPPORTS

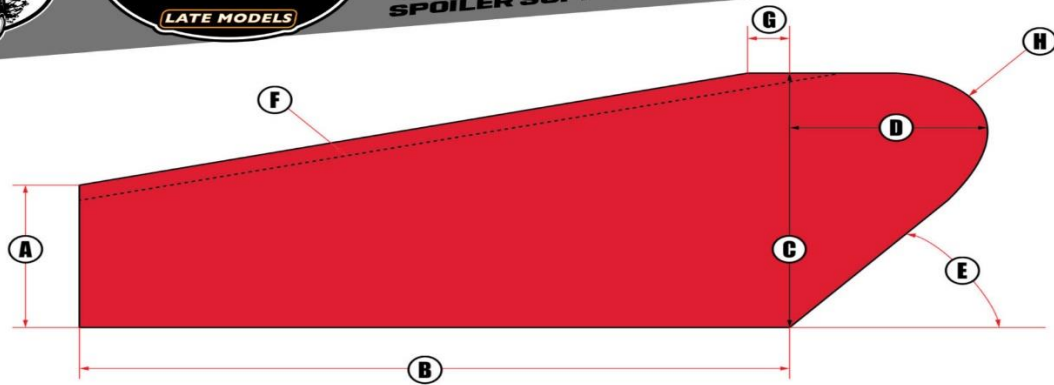

- A** Four and One Half Inches (4.5")
- B** Eighteen Inches (18")
- C** Eight Inches (8")
- D** Eight Inches (8")
- E** Forty-Five Degrees (45°) from mounting surface
- F** Broken line indicates one-half inch (1/2") MAXIMUM break
- G** One inch (1")
- H** Radius must be MINIMUM of two inches (2") at top rear
- NOTE** No more than three (3) spoiler supports permitted. Front edge of supports must be in line.
- NOTE** DIMENSIONS HAVE ZERO TOLERANCE!



2024 LATE MODEL BODY DIMENSIONS TOP VIEW

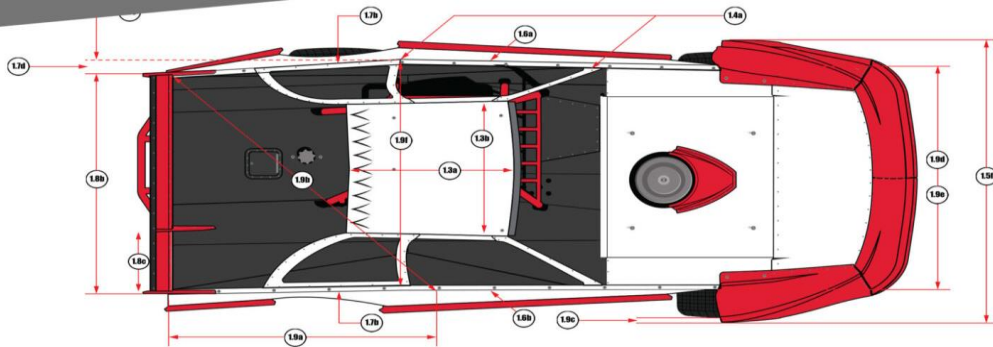

- 1.3a** Roof length must be a minimum of forty-four inches (44") to a maximum of fifty-four inches (54")
- 1.3b** Roof width must be a minimum of forty-eight inches (48") to a maximum of fifty-two inches (52")
- 1.4a** All roof side panels must extend to edge of decking
- 1.5i** Front fender flares cannot extend beyond front tire more than one-inch (1") in width with the wheels pointed straight
- 1.6a** Door cannot exceed seventy-seven inches (77") in it's entirety at top of door
- 1.6b** Door cannot exceed ninety inches (90") in width at the bottom in the center of the car
- 1.7b** The quarter panels cannot exceed seventy-six inches (76") in width at any point behind the center of the rear hub as measured at the top
- 1.7c** Rear decks must taper from seventy-six inches (76"), as measured at the top over the rear hubs, uniformly back to seventy-two inches (72") at the spoiler, equally on both sides
- 1.7d** Four inches (4")
- 1.8b** Maximum spoiler width is seventy-two inches (72")
- 1.8c** Breakaway panel maximum of twenty one inches (21")
- 1.9a** Reference point. Ninety-six inches (96") from rear deck bar
- 1.9b** Diagonal reference point. One-hundred seventeen inches (117") from left-rear spoiler to 1.9a reference point
- 1.9c** Outside of right-front fender to outermost point of right front tire
- 1.9d** Total width of fenders at center of tires must be seventy-six inches (76")
- 1.9e** Total with of the top of the body at the hack of the hood cannot exceed seventy-six inches (76")
- 1.9i** Total width of the top of the body at the roof post cannot exceed seventy-six inches (76")